



VITREOUS CHINA

TOILET  
EF-21-312

LAVATORIES

TOILETS

BIDETS / URINALS

CAST IRON



# ULTRA FLUSH® 1.1 Pressure-Assist Toilet Elongated

12" Rough-in

### Features:

- Water Conservation 1.1 gpf (4.0 Lpf)
- Elongated Bowl
- Pressurized Flushing Action
- Close Coupled Flushometer Tank
- Siphon Jet
- Front Tank Lever
- 2 Bolt Caps




### Dimensions:

- Height ..... 28 1/4"
- Width ..... 20 1/4"
- Depth ..... 30"
- Water Surface from Rim ..... 4 1/2"
- Trapway (ave)\* ..... 3 1/3"
- Trapway (min)..... 2"
- Water Surface ..... 12 1/2" x 10 1/2"
- Water Seal ..... 2 1/2"
- Shipping Weight ..... 92 lbs

\*Average diameter of 26 equally spaced points throughout the trapway of 3 randomly selected bowls

**Specifications:** Bowl—#21-372 Elongated Bowl  
Seat not included

Tank—#EF-28-380

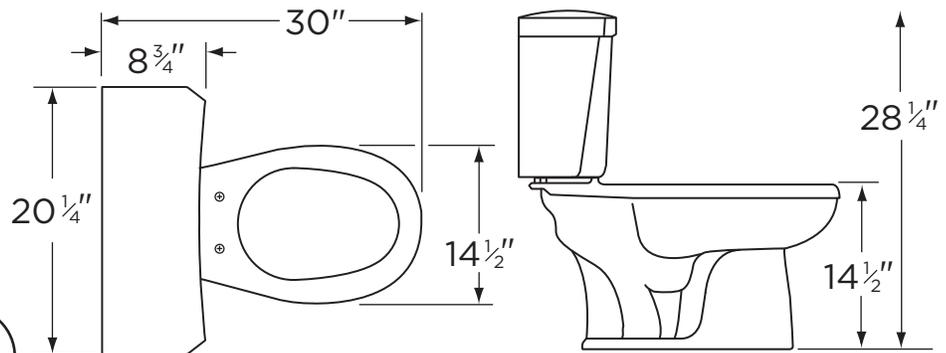

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY TOILET (HET) WITH AN AVERAGE CONSUMPTION OF 1.1 GPF OR LESS.

HIGH EFFICIENCY TOILET  
**HET**




www.gerberonline.com

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	



# 1.1 gpf (4.0 Lpf) ULTRA FLUSH® 1.1 TOILET

EF-21-312  
Elongated, 12" Rough-in  
(Bowl 21-372 with Tank EF-28-380)

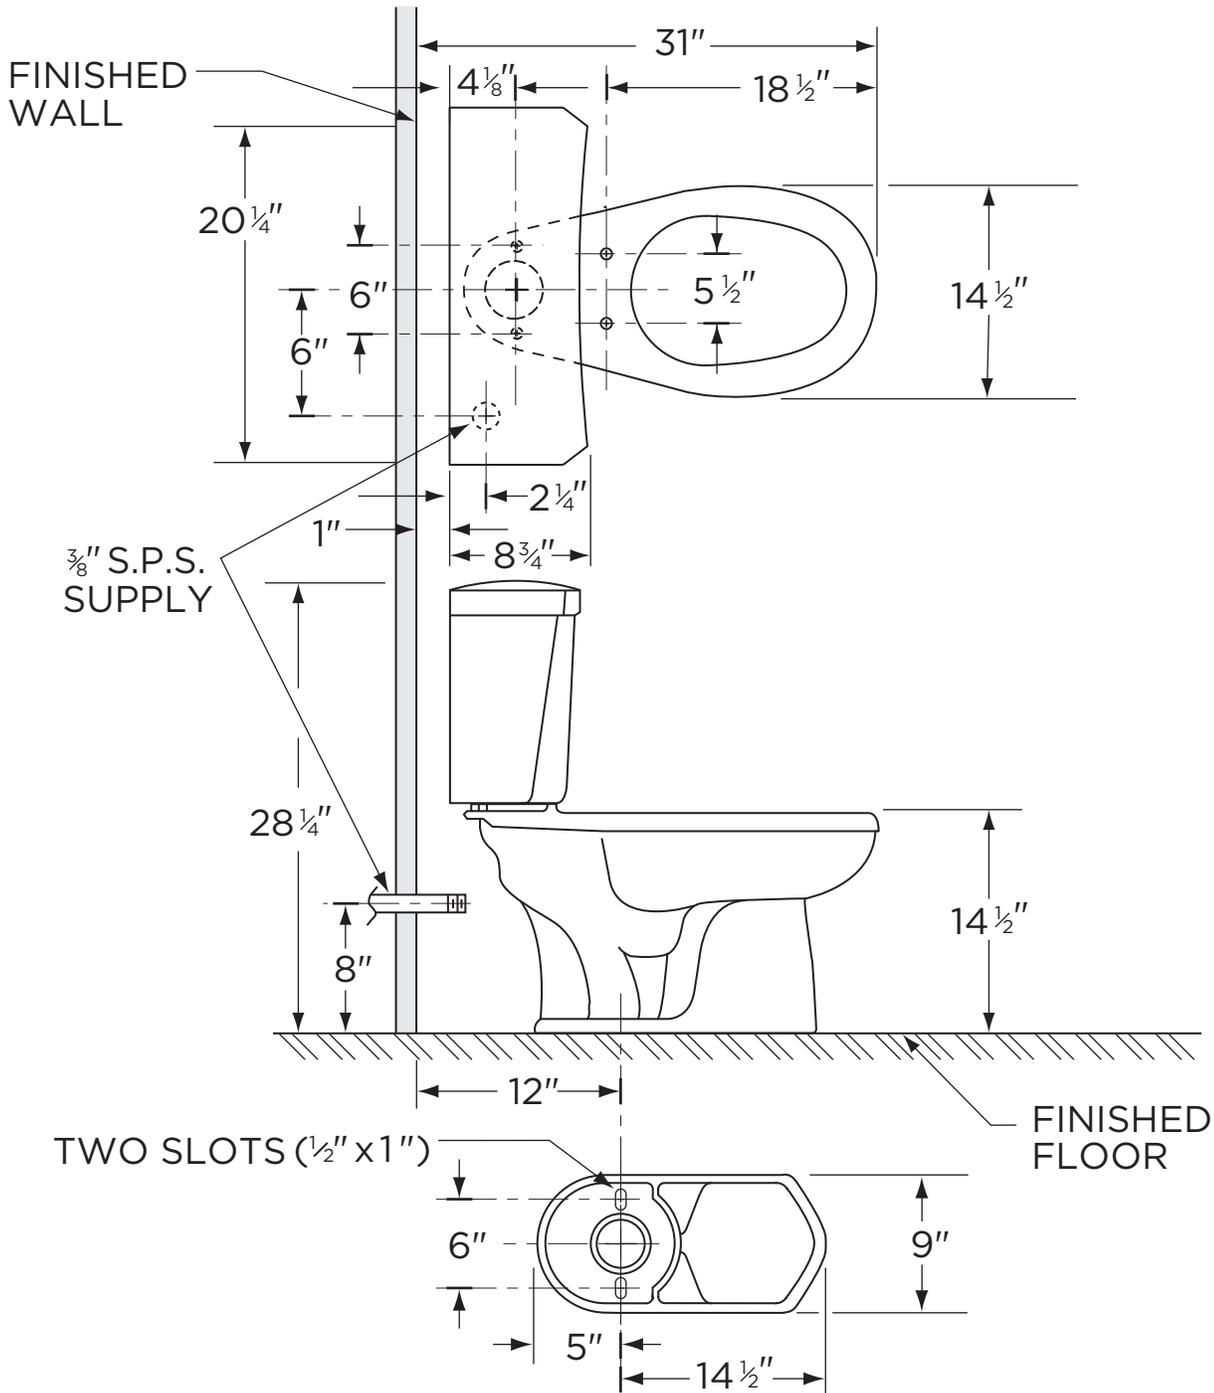

NOTES:  
All dimensions are in inches.  
Illustrations may not be drawn to scale.

IMPORTANT:  
Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.  
THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY TOILET (HET) WITH AN AVERAGE CONSUMPTION OF 1.1 gpf OR LESS.

⌀  
of  
WASTE  
OUTLET